


Event Post - Assembly Instructions

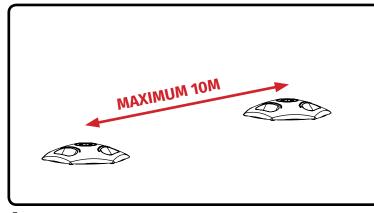

1 LAY BASES IN POSITION WITH A MAXIMUM GAP OF 10 METRES



2 SCREW POST INTO BASE

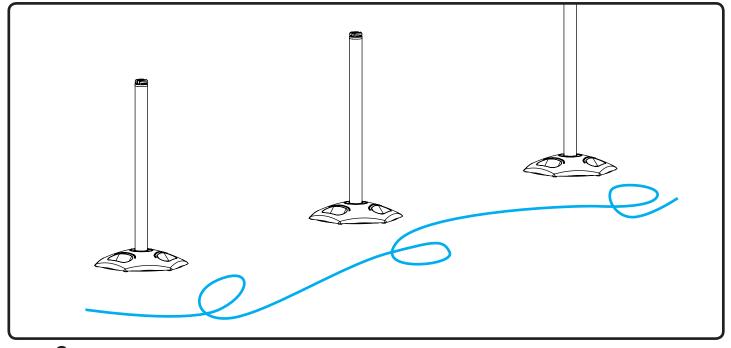

3 LAY ROPE ON FLOOR ALONGSIDE POSTS, LEAVING SOME EXCESS AT THE START, END AND AT EACH POST

MILTON KEYNES +44 1908 684 600 NEW YORK +1 631 666 0336


DUBAI +971 4 2997 228 **PARIS** +33 1 43 09 85 00 FRANKFURT +49 69 3003 89 010 WROCLAW +48 71 359 3800

WWW.TENSATOR.COM


Owing to the dynamic nature of our business, specifications are constantly being changed and therefore this literature is for information purposes only. For the most up to date information, please visit our website www.tensatorgroup.com. Tensator makes no warranties, express or implied, in this document. E&OE

TENSATOR®


INSTRUCTION SHEET

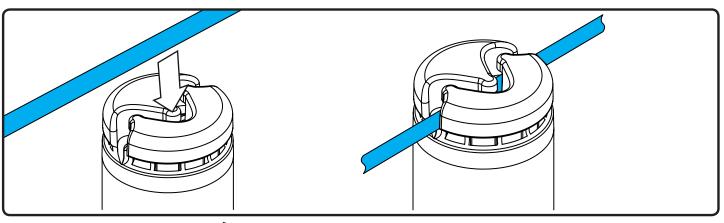

4 PUSH ROPE INTO CHANNEL AT THE TOP OF THE POST

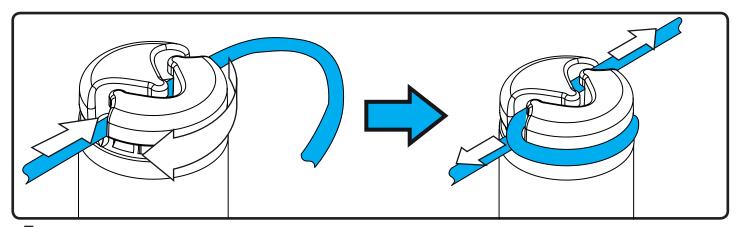

5 WRAP THE ROPE AROUND THE SIDE OF THE TOP CAP, THEN PUSH ROPE BACK INTO CHANNEL AND PULL TIGHT IN BOTH DIRECTIONS

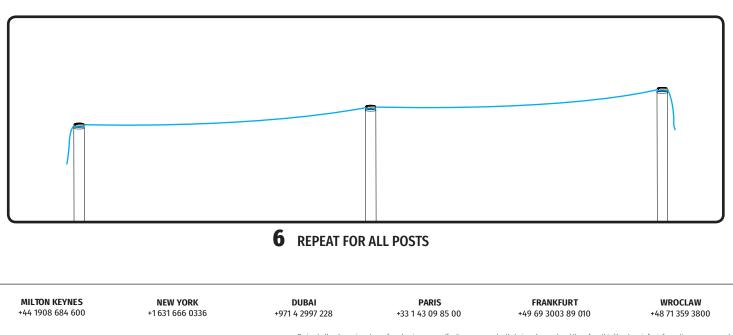

WWW.TENSATOR.COM

Owing to the dynamic nature of our business, specifications are constantly being changed and therefore this literature is for information purposes only. For the most up to date information, please visit our website www.tensatorgroup.com. Tensator makes no warranties, express or implied, in this document. E&OE